


Stainless Anchor Swivels

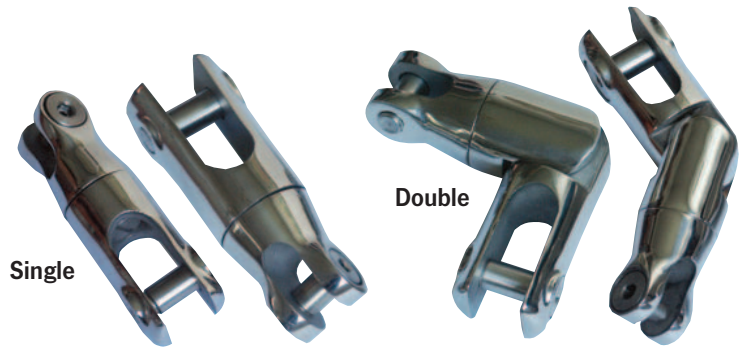

Model	Type	Fits chain	Length	Width
6650501	Single	1/4-5/16" (6-8mm)	3.8" (95mm)	0.64" (16mm)
6650502	Single	3/8-1/2" (10-12mm)	4.4" (110mm)	0.8" (20mm)
6651001	Double	1/4-5/16" (6-8mm)	4.8" (120mm)	0.64" (16mm)
6651002	Double	3/8-1/2" (10-12mm)	6.2" (155mm)	0.76" (19mm)

Anchor Connectors

316 stainless steel or hot dip galvanized

Model	Material	Fits chain	Length	Width
6650101	Stainless	1/4-5/16" (6-8mm)	3.6" (90mm)	0.6" (15mm)
6650102	Stainless	3/8-1/2" (10-12mm)	4.0" (100mm)	0.84" (21mm)
6650201	Galvanized	1/4-5/16" (6-8mm)	3.6" (90mm)	0.6" (15mm)
6650202	Galvanized	3/8-1/2" (10-12mm)	4.0" (100mm)	0.84" (21mm)



Galvanized Shackles



- Quality hot dip galvanized steel
- Also available in stainless steel

Model	Size	Pin Dia.
301550132	1/4"(6mm)	5/16"(8mm)
301550133	5/16"(8mm)	3/8"(9.5mm)
301550134	3/8"(9.5mm)	7/16"(11mm)
301550135	7/16"(11mm)	1/2"(6mm)
301550136	1/2"(12mm)	5/8"(16mm)
301550148	5/8"(16mm)	3/4"(19mm)

Load Rated Galvanized Shackles

Model	Size	Pin Dia.	Working Load Limit
301550128	3/8" (9.5mm)	1/4" (6mm)	2,000lb (900kg)
301550129	7/16" (11mm)	1/2" (12mm)	3000lb (1350kg)
301550130	1/2" (12mm)	5/8" (16mm)	4000lb (1800kg)
301551529	5/8" (16mm)	3/4" (19mm)	6500lb (2925kg)

Thimbles



Size	Nylon	Stainless Steel	Galvanized
1/16" (2mm)	-	29373	-
1/8" (3mm)	16946	18487	-
5/32" (4mm)	44592	18488	-
3/16" (5mm)	44594	18489	13364
1/4" (6mm)	44596	18490	13365
1/4" (7mm)	24134	29374	-
5/16" (8mm)	44598	18491	13366
3/8" (10mm)	44600	18492	13367
1/2" (12mm)	44602	18493	13368
9/16" (14mm)	29372	18494	13369
5/8" (16mm)	44605	29375	-
3/4" (18mm)	44607	29376	13370
13/16" (20mm)	44609	29377	-
7/8" (22mm)	44611	-	-
1" (24mm)	44613	-	-