

• Can be highlighted with teak batten accent trim




Image	Model	Description	Length	Diagram Height "A"	Diagram Width "B"	Hole Spacing
	97818	Toe Rail	19.7' (6m)	2.4" (60mm)	1.9" (47mm)	7.9" (200mm)
	97793*	Set, short ends, solid	6.9" (175mm)	2.4" (60mm)	1.9" (47mm)	-
	97797*	Set, fairlead ends, closed	6.9" (175mm)	2.4" (60mm)	1.9" (47mm)	1.4" (35mm)
	97795*	Set, fairlead ends, open	6.9" (175 mm)	2.4" (60mm)	1.9" (47mm)	3.3" (85mm)
	105601*	Middle fairlead	5.3" (135mm)	2.4" (60mm)	1.9" (47mm)	3.3" (85mm)
	97800*	Set, fairlead ends, open (boats >35')	9.1" (230mm)	2.8" (70mm)	2.1" (50mm)	6.1" (155mm)
	97799*	Middle fairlead (boats >35')	7.1" (180mm)	2.8" (70mm)	2.1" (50mm)	6.1" (155mm)
	105538*	Teak accent trim	6.6' (2m)	-	-	-
	97798	Assembly rail connector	4.7" (120mm)	1.3" (33mm)	3.5" (90mm)	-
	97796*	Aluminum stanchion base	1.8" (46mm)	2.8" (70mm)	2.4" (61mm)	-

*shown with optional teak piece

811 Toe Rail

- Designed for boats 35-40' (10-12m)
- Slightly angled profile and a flat surface
- Rectangular cutouts: 2.6" x 1.14" (65x29mm)
- Spacing: 9.0" (225mm)







Image	Model	Description	Length	Diagram Height "A"	Diagram Width "B"	Hole Spacing
A	97824	Toe Rail	19.7' (6m)	2.2" (55mm)	1.7" (44mm)	4.4" (112mm)
B	97801	Set, short ends, solid	2.8" (70mm)	2.3" (58mm)	2.0" (50mm)	-
C	97804	Set, fairlead ends, closed	7.1" (180mm)	2.1" (52mm)	1.8" (45mm)	2.4" (61mm)
D	97767	Middle fairlead	5.9" (150mm)	2.2" (55mm)	1.8" (45mm)	2.3" (59mm)
E	105643	Assembly rail connector	0.6" (15mm)	2.3" (58mm)	1.9" (47mm)	-
F	97436	Aluminum stanchion base	3.2" (80mm)	3.0" (77mm)	3.5" (85mm)	2.2" (57mm)

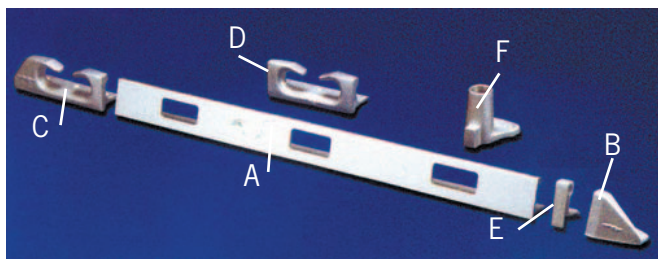



822 Toe Rail

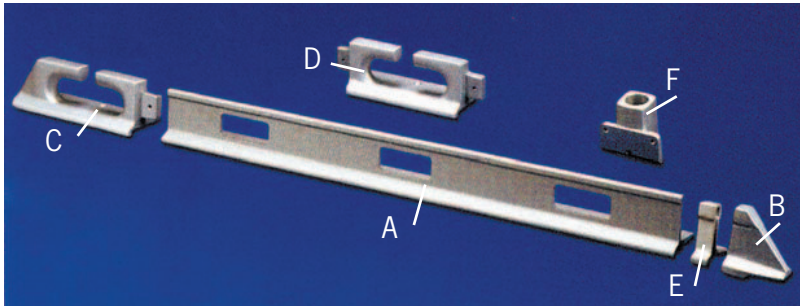

- Designed for boats 45' (13.7m) and larger
- Straight vertical shape
- Rectangular cutouts: 2.8" x 1.08" (70x27mm)
- Spacing: 9.0" (225mm)

Image	Model	Description	Length	Diagram Height "A"	Diagram Width "B"	Hole Spacing
A	97831	Toe Rail	19.7' (6m)	2.6" (67mm)	2.3" (59mm)	4.4" (112mm)
B	97805	Set, short ends, solid	2.6" (65mm)	2.8" (70mm)	2.7" (68mm)	-
C	97807	Set, fairlead ends, closed	7.9" (200mm)	2.8" (70mm)	2.4" (61mm)	3.0" (75mm)
D	105598	Middle fairlead	6.5" (165mm)	2.8" (70mm)	2.4" (61mm)	-
E	97783	Assembly rail connector	0.8" (20mm)	2.8" (72mm)	2.7" (68mm)	-
F	97437	Aluminum stanchion base	3.0" (77mm)	2.8" (70mm)	1.6" (40mm)	2.4" (60mm)

823 Toe Rail

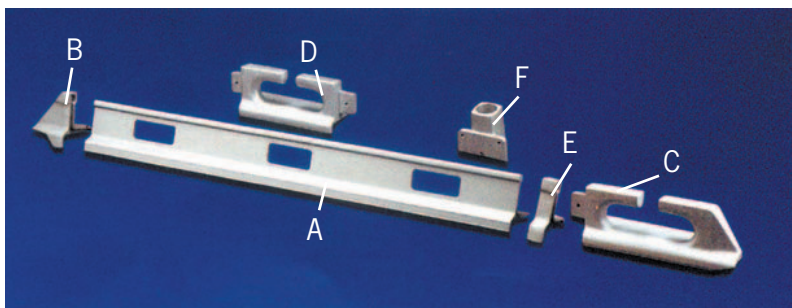

- Designed for boats 45' (13.7m) and larger
- Taller flange than 822 toerail
- Rectangular cutouts: 2.8" x 1.08" (70x27mm)
- Spacing: 9.0" (225mm)

Image	Model	Description	Length	Diagram Height "A"	Diagram Width "B"	Hole Spacing
A	97841	Toe Rail	19.7' (6m)	3.0" (76mm)	2.3" (59mm)	4.4" (112mm)
B	97809	Set, short ends, solid	2.6" (65mm)	3.2" (80mm)	2.6" (67mm)	-
C	97811	Set, fairlead ends, closed	7.9" (200mm)	3.1" (78mm)	2.4" (61mm)	3.0" (75mm)
D	97810	Middle fairlead	6.5" (165mm)	3.1" (78mm)	2.4" (61mm)	-
E	97737	Assembly rail connector	0.8" (20mm)	3.1" (79mm)	2.6" (67mm)	-
F	97437	Aluminum stanchion base	3.0" (77mm)	2.8" (72mm)	1.6" (40mm)	2.4" (60mm)